


REMOVED FROM THE OFFER!

Product card: PLA-ST filament for 3D printing.

Product description: Filament PLA-ST (semi transparent) - thermoplastic polyester in the form of fiber, used for 3D printing using the FFF method. Filament wound on a spool, vacuum packed with a moisture absorber. The spool contains 1 kg of net material. It can be used in all FFF printers that are not protected from external suppliers and open source structures before using. PLA-ST is a biodegradable material, produced from renewable natural resources. It is dedicated primarily to amateurs due to trouble-free use.

Physical properties of the product:

Diameter of filament	1.75 mm
Dimensional tolerance of filament	+/- 0.05 mm
Roundness of filament	+/- 0.02 mm
Surface of the material	Gloss
Shrinkage of the material	Very low
Product weight	1.0 kg net, 1.36 kg gross
Spool - material	Transparent polycarbonate
Weight of the empty spool	~250 g
The diameter of the spool	200 mm
Width of spool	~70 mm
Diameter of mounting hole	52 mm
Packaging	Printed cardboard
Package size	~205x205x80 mm
Vacuum packing	Yes
Moisture absorber	Yes

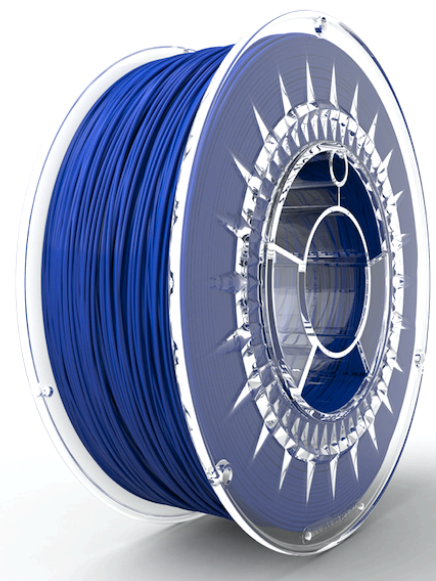

Suggested printing parameters:

Hotend	200-235°C
Heated bed	50-60°C
Cooling the printout	Recommended

Due to the structural differences of printers, the above figures should be considered as guidelines and the corresponding values must be determined experimentally.

REMOVED FROM THE OFFER!

Physical properties of the material:

Density	1.24 g/cm ³	ASTM D1505
Elongation at Break	160%	ASTM D882
Spencer Impact	2.5 joules	-
Softening temperature	~50°C	-

Availability of colors and diameters:

Color	Kolor	1.75
Bright Yellow Semi Transparent	Jasnożółty Półtransparentny	
Bright Green Semi Transparent	Jasnozielony Półtransparentny	
Blue Semi Transparent	Błękitny Półtransparentny	